



International Journal of Multidisciplinary Engineering in Current Research

Volume 6, Issue 9, September 2021, <http://ijmec.com/>

A ROBOT CONTROLLED BY HAND GESTURES

Zainab Unnisa¹ 'Dr.Syed Abdul Sattar²

Professor¹, Lecturer professor²

Department Of ECE

NAWAB SHAH ALAM KHAN COLLEGE OF ENGINNERING & TECHNOLOGY
NEW MALAKPET , HYDERABAD-500 024

Abstract:

This project is developing a hand-gesture-based interface for directing a vehicle robot's navigation. Hand gestures are recorded on the screen using a three-axis accelerometer that measures acceleration. There are a few peculiarities to the situation: An RF module facilitates wireless communication between a microcontroller and an RF module. These signals are then categorised into one of six different control types, which are discussed in more detail below. An established path should be followed while operating an autonomous vehicle. After this, the microcontroller is activated. Identifying and classifying hand movements is accomplished via the use of a method called hand trajectory classification. According to the simulation's findings, With a 92.2 percent accuracy rate, the classifier was considered to be a success.

Keywords - Gesture Control, Accelerometer, Microcontroller.

I. OVERVIEW AND INTRODUCTION

Robots are playing an increasingly important part in automation across a wide range of industries, including construction, military, medical, and industrial.etc. Following the construction of certain fundamental robots, such as a line follower, We have created a robot, a computer-controlled robot, and other similar devices. this gesture-controlled robot with an accelerometer is controlled by a Arduino Uno is a microcontroller board. We've employed hand gesture movements to propel the vehicle. An accelerometer is used by the robot. A gesture-controlled robot is one that is controlled by moving the hand in certain ways. alternative to any other means such as buttons or a joystick Here's an

example: To operate the robot, all that is required is a movement of the hand. A The user's hand is placed on a transmitting device, which transmits data. features an RF transmitter as well as an accelerometer for transmitting a signal instruction to the robot in order for it to carry out the needed function It involves going ahead, turning around and coming to a complete halt These The hand gesture will be used to identify which activities are being performed. The accelerometer is the most important component in this case. An An accelerometer is a device that

measures three-axis acceleration. with a range of $\pm 3g$ Polysilicon is used in the construction of this gadget. measuring using a surface sensor and a signal processing circuit acceleration. The output of this gadget is in Analog and also has a digital component. inversely related to the rate of acceleration The gadget is used to measure the When gravity is slanted, the static acceleration of gravity produces a result in terms of the letter 'g' .

II. BLOCK DIAGRAM

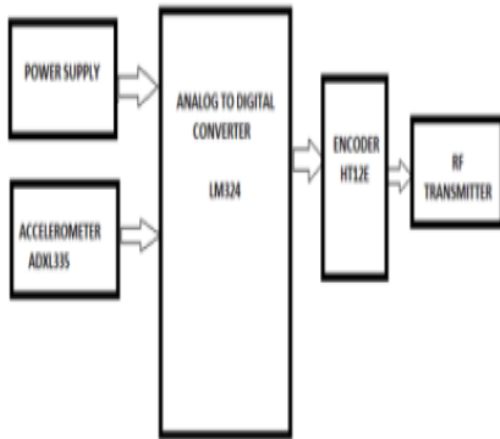


Fig 1. Transmitter Circuit

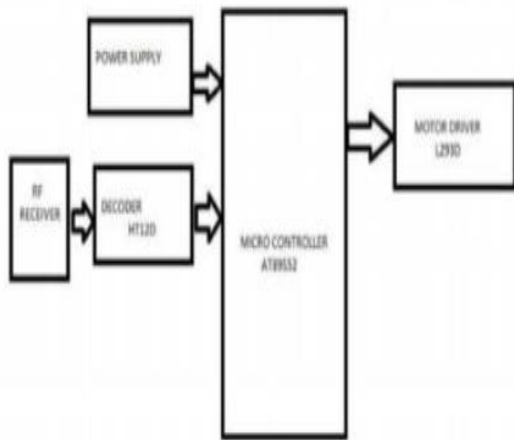


Fig 2. Receiver Circuit

III. DESCRIPTION

It is possible to operate a Gesture Controlled robot using your hands and other body parts, which is

known as a Gesture Controlled robot. All you need is a little transmitting device that fits in your palm and should be equipped with an antenna to do this. In order for the acceleration metre to transmit the proper command to the vehicle we must programme a robot in order for it to be able to accomplish whatever task we ask of it. The person who is doing the broadcasting The gadget included an ADC (analogue to digital converter) that was designed specifically for it. In addition to an encoder integrated circuit (HT12E), which is used to encode the four-bit information. The information will be sent via the usage of an RF Transmitter module. The signal is received by means of an RF Receiver, which is installed at the receiving end. The encoded data is delivered to the decoder IC, which then decodes it and sends it back to the computer. A microcontroller is a tiny electrical device that performs several tasks. This information is analysed, and the motor driver is called upon to govern the vehicle's performance. motors. When the user moves his hand, the device recognises and transfers the information to the appropriate location.

decision-making cue to make a decision This approach involves a microcontroller collecting the output from the accelerometer and using it to move the operation ahead in the process. The controller is configured to work in line with the sensor output, and it communicates with the rest of the system by sending out orders. It is necessary to provide the proper signal to the motors. It makes use of two direct current motors to do this. When they move, a single motor driver integrated circuit (IC) is used to propel them forward and back. ensuring that sufficient current is supplied to motors All of this information is at your disposal. the vehicle is mounted on a metal chassis with a steel frame We are expressing ourselves by moving our hand to the right.



International Journal of Multidisciplinary Engineering in Current Research

Volume 6, Issue 9, September 2021, <http://ijmec.com/>

The robot will go to the right-hand side of the display.

IV. WORKING PRINCIPLES AND TECHNIQUES

The accelerometer is the brains of our gesture-controlled robot, and it is responsible for all of its operations. outputs, which correspond to hand gestures, and transmits the information obtained from these outputs Data is sent into a comparator, which assigns a certain voltage level to each input signal based on the data received. Swaying of the body is defined as follows: In order for information to be encoded, it must first be sent through an encoder. which encrypts the data before it is sent across radio frequency Alternatively, on the other extreme of the spectrum, The information is received wirelessly via the use of radio frequency transmission technology (RF). These Decisions are sent to the motor driver, who in turn engages the vehicle's controls. the use of motors in certain configurations to enable the robot to move in a particular direction variously in a variety of different directions

V. HARDWARE REQUIREMENTS

, MICROCONTROLLER

It has eight bits and 8K bytes of in-system flash memory. The AT89S8252 is a low-power, high-performance CMOS microcontroller with low

power consumption. Flash memory that may be customised is referred to as programmable memory. It has something to do with circuits, as you can see. As an example, consider a crystal with capacitors. Pull-up resistors, resetting circuitry, and other components in addition to (if required) and so forth. The microcontroller is in charge of regulating the flow of information. The device interfaces with the devices with which it is communicating and interacts with the devices. the programme presently in development, according to the current software staying on top of things It is necessary to protect the integrity of the Specifications.

TRANSMITTER

The transmission segment is divided into three distinct sections. They There are ADC converters, encoders, an accelerometer, and an RF transmitter among the components on the board. Transmitter

Power supply

Because of the controlled power supply, the voltage input to the circuit is maintained at a constant level. There are two steps in the alternating current input voltage, which comes from the power source (230V). After being lowered to 12V via a transformer, the voltage is delivered to a rectifier for further processing. The When a rectifier is used, the output voltage is typified by pulsating voltage. As a consequence, the final product The voltage output from the rectifier is passed via a filter, which eliminates any undesired components. The air conditioner is making a lot of noise. It is now



International Journal of Multidisciplinary Engineering in Current Research

Volume 6, Issue 9, September 2021, <http://ijmec.com/>

necessary to send this voltage to a voltage regulator, which adjusts the voltage. Obtain a voltage that is pure direct current.

GOVERNMENTAL VOLTAGE REGULATORS

Voltage regulator integrated circuits are available with either a fixed or a dynamic output voltage, depending on the configuration. The majority of regulators have built-in defence against this kind of attack. The use of high current and heating (known as "overload protection"). It is known as "thermal protection" when this occurs. The LM7805 is easier to operate, and it allows you to do more with it. Connecting the positive terminal of your DC power supply to an electrical outlet is as simple as it gets. Connect the input pin to the negative of the Common pin, and then the positive of the Common pin to the Input pin to complete the circuit. When you turn on the power, the battery will provide you with a 5-volt supply. The following is the definition of the output pin:

ACCELEROMETER

An accelerometer is a sensor that detects the acceleration of a moving object and records the information. Vibrations are used to detect and measure them, or vibrations are used to measure them. The definition of gravitational acceleration is (inclination). Accelerometers have the capability of measuring acceleration. Vibration measurements on

vehicles, buildings, and process control are all possible. They are also used in the detection and measuring of seismicity. Machine vibration, distance, and speed are all measured with or without inclination, machine vibration, distance, and speed without being affected by the gravitational pull of the earth.

HT12E

An encoder with four bits of resolution, the HT12E is capable of encoding both the input and the output. Information that has been used in conjunction with it. Parallel inputs will be converted into a serial output configuration by this device. Transforms the 12-bit parallel data into a serial format for transmission as an output of the converter. Transmission is performed by the employment of a radio frequency transmitter (RF transmitter). The term for these 12 bits is referred to as. In the division, eight address bits and four data bits are utilised in conjunction with each other. When the TE is called into action. When the pin is tripped, the programmed addresses and data are fed into the computer's memory. The header bits are sent with the data via radio frequency (RF) or infrared signals. transmission.

RF-TRANSMITTER

The transmitter is a kind of electrical equipment that converts one type of energy into another type of energy. It translates the measurements from a sensor into a signal, which it then transmits across a communication network. Regardless of whether the signal is sent

wired or wirelessly, it will be received by a control device. The transmitter (Tx) operates at a frequency of 434 MHz, which is the same as the receiver (Rx). receives serial data and wirelessly transmits it across radio frequency to its destination (RF).antenna. This transmission occurs at a rate of 1Kbps - one thousand bits per second - which is one thousand bits per second.10Kbps.

RECEIVER FOR RADIO FREQUENCY

One of the most easy approaches for incorporating wireless technology is via the use of radio frequency receivers (RF).control. It gets information from the gesture device whose data it receives and uses that information.The functioning of the transmitter is quite similar to that of the receiver. The data pin is referred to by the abbreviationThis port is used to connect to the HT12D decoder.

HT12D

It converts serial data into parallel data, which may subsequently be handled by other components of the system.The radio frequency signal is then received by the radio frequency receiver. If the decoding of the input data is successful, the procedure is complete.There were no faults or mismatched codes identified throughout the testing process. A message that is legally enforceableVoltage Terminal pins that receive a strong signal indicate that the pin has been tagged.

VI. WORKING

Using gestures to control a robot, we may make it move in reaction to the motions of our hand, which are sensed by the device in our hand. As soon as we move our hand to the front side of the robot, it starts to move forward and upward.maintains its current course until the next instruction is receivedWhen we tilt our hand to the backside, the robot's state changes and it responds in a new manner.They continue to move in the other direction until another comes along to take their place.You have received the order to do so. It gets more obvious if we tilt the camera to the left a little bit.until the next order is received, it will turn to the left When we put our hand in our pocket, we are expressing our gratitude.The right-side robot has been relocated to the right as a result of this change.

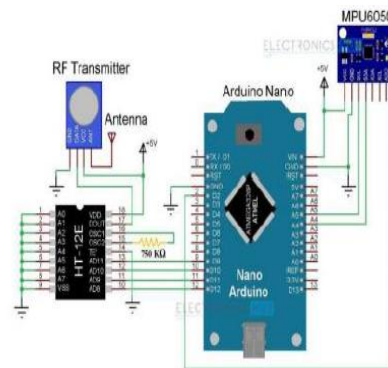


Fig 3. Transmitter

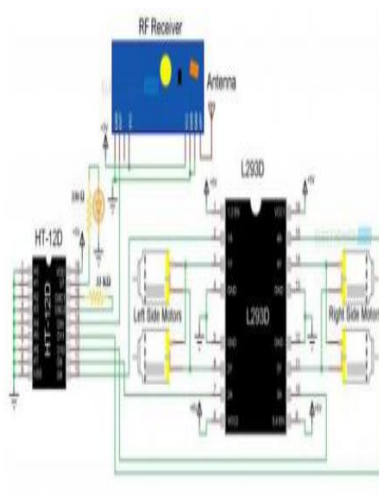


Fig 4. Receiver

The circuit for this robot, which is controlled by hand gestures, is rather easy. It may be found here. An RF pair is used to communicate with and connect to the Arduino, and this is how communication and connection are reformed. A shield connects the Arduino to the motor driver, which allows it to communicate with it. control the motions of the robot. It is necessary to utilise the motor driver's pins 2, 7, 10, and 15 as inputs. are connected to the digital pins 6, 5, 4, and 3 of the Arduino microcontroller (in this order). We've arrived. The robot is powered by two direct current motors, one of which is a brushless motor, which operate the arms and legs. In this example, the motor's outputs are connected to those of motor drivers 3 and 6 respectively. Between the numbers 11 and 14, there is another motor that is connected. A 9-volt battery is a rechargeable battery with a capacity of 9 volts. It is also used to provide power to the motor driver, which is in charge of controlling the motors' operation. Movement-related circumstances are shown in Fig. 5.

VII. THE FINAL DETERMINATION

The Arduino Uno is used to operate a robot that responds to hand gestures. Throughout the course of this project, the creation of a microcontroller has been underway. It is possible to control the robot using hand gestures similar to those of a person. This is something that has to be addressed. With the help of an antenna attached to a little transmitting device we are holding in our hand. In addition to the accelerometer, which sends particular commands to the computer, To direct the robot's movement in line with the user's hand movements. At the robot, there is just one receiver in use. It is customary to use the RF module at a frequency of A range of 100 metres is provided by this device, which runs at a frequency of 434MHz. Transmission speeds range from 1Kbps to 10Kbps, depending on the protocol used. The RF receiver, which is controlled at the transmitter, receives the data sent. the same frequency as that used by the transmitter. Transmission It is normally better to communicate using radio frequency (RF) (radio frequency). The acronym IR (infrared) refers to infrared radiation.

IX Future scope

- In the future, we may be able to develop a wireless robot that is capable of sensing and understanding its environment. You may be able to create a hand gesture using wireless technology. In military applications, it has the potential to serve as a robot vehicle, among other things. Managing this situation may help soldiers limit the amount of deaths on the battlefield.
- Our system has shown the capacity to communicate with and interact with other systems. The challenge of directing machines using gestures is a feasible one, and the collection of gestures available is extensive. The number of



International Journal of Multidisciplinary Engineering in Current Research

Volume 6, Issue 9, September 2021, <http://ijmec.com/>

instructions that may be performed based on motions that are recognised may be enhanced by a factor of two. bringing a more complex model of a high-performance car into operation. This is not just due to the limited amount of accessible area, but also due to the greater geographic location also on the roads and byways. In the future, service robots will perform a broad range of tasks for a variety of clients. private transportation all the way up to a fully-fledged sophisticated environment. Automobiles that may change the disabled into persons who are totally functioning in all aspects of their lives

X. Conclusion

Finally, a conclusion is reached, as well as an outline for future research. In this paper, we provide a computer-interaction interface that is based on hand gestures and gesture recognition in order to navigate a self-driving automobile robot. A car-robot may be operated by the person who owns it. just using his or her own hand trajectory, he or she may do so

instantly. We want to continue to collaborate in the future as well. will do the work using a cell phone equipped with an accelerometer in order to save time. the ability to direct the movement of an automobile robot. In the future, we want to add more hand movements to the mix as well. access the interface in order to modify the interface (such as the curve and slash) in a more natural and efficient way than the car

REFERENCES

- [1] Chan Wah NG, Surendra Ranganath, Real-time Gesture Recognition System And Application Image And Vision Computing(20): 993-1007, 2002.
- [2] Sergios Theodoridis, Konstantinos Koutroumbas, Pattern Recognition, Elsevier Publication, Second Edition, 2003.
- [3] SeyedEghbal Ghobadi, Omar Edmond Loepprich, Farid Ahmadov Jens Bernshausen, Real Time Hand Based Robot Control Using Multimodal Images, Iaengm International Journal Of Computer Science, 35:4, IJCS_35_4_08, Nov 2008.
- [4] <https://circuitdigest.com/microcontrollerprojects/accelerometer-basedhand-gesture-controlled-robotusing-arduino>